


DYNAPAC

Part of the Atlas Copco Group

CC800 Tandem Asphalt Roller



Technical data

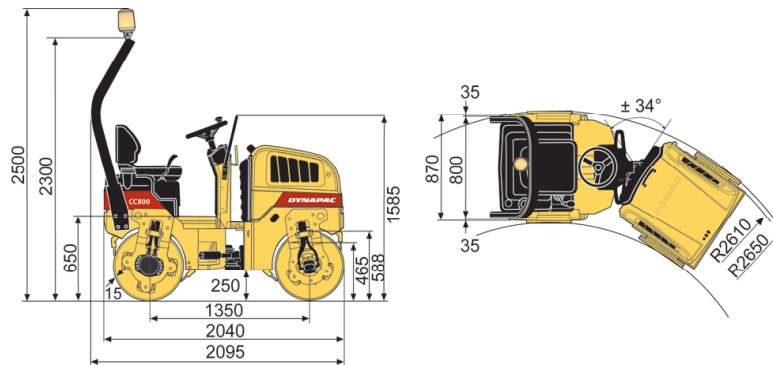

Masses (kg)

Operating mass (incl. ROPS)	1575 (1600*)
Drum module mass, front/rear	740/835
	(* with optional ballast mass)

Traction

Speed range (km/h)	0 - 9
Vertical oscillation (°)	±7
Theor. gradeability (%)	40

Compaction

Static linear load, front/rear (kg/cm)	9,3 / 10 (10 / 10*)
Nominal amplitude (mm)	0,4
Vibration frequency (Hz)	70
Centrifugal force per drum (kN)	17
Water tank (l)	110

Engine

Model	Perkins 403D-11
Type	Water cooled diesel
Rated power, SAE J1995, at 2600 rpm, kW (hp)	17 (23,5)
Fuel tank capacity (l)	23

Hydraulic system

Driving	Axial piston pump with variable displacement and servo.
	2 radial piston motors with constant displacement.
	Gear pump/motors with constant displacement.
Vibration	Gear pump with constant displacement.
Steering	Hydrostatic in forward and reverse lever.
Service brake	Failsafe brake in both drums.
Parking/Emergency brake	

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.